



# SAVE GREEN -WITH- LED

Presenting New ECO Friendly Series..



جدة - شارع فلسطين  
حي المشرفة. ٦٥٩ - ٢٢٣١  
ص.ب: ١٩١٣٦ - جدة، ٢٠٣٥٠ | جوال: ٠٥٦٢٣٨٧٠ | هاتف: ٠٢٦٥٥٣٥٧٢ | info@redmondsarabia.com

Jeddah-Falastien Street  
Mushrifah District. 6259-23331  
P.O. BOX 109636 - Jeddah 21351  
Ph: 0556630870 | Tel: 0126553572 | info@redmondsarabia.com



# A New Solution For Life begins....



[www.redmondsarabia.com](http://www.redmondsarabia.com)

## LIGHT SOURCE



### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
T8018C	AC85-265V	20	80	145	30	42*34*31
T10028C	AC85-265V	30	100	165	20	52*32*36
T13550C	AC85-265V	50	135	210	20	68.5*28*48




### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	BODY CARTON(cm)
T14050P	AC85-265V	50	140	20	77*31.5*44	
T17080P	AC85-265V	80	170	20	89.5*36.5*49	
T190100P	AC85-265V	100	190	10	97*39.5*29	
T230150P	AC85-265V	150	230	8	49*49*58	



## LIGHT SOURCE



### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	CARTON(cm)
			A	B		
T4007L	AC85-265V	7	40	117	200	43*43*25.5
T4009L	AC85-265V	9	40	138	100	43*22*29
T5012L	AC85-265V	12	50	175	100	53*27*36.5
T5018L	AC85-265V	15	50	175	100	53*27*36.5
T6024L	AC85-265V	3	60	190	50	61*31*21



### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	CARTON(cm)
			A	B		
T3707T	AC85-265V	7	37	104	100	39*20.5*24.5
T3709T	AC85-265V	9	37	115	100	39*20.5*25
T4412T	AC85-265V	12	44	139	100	48*25*29
T5015T	AC85-265V	15	50	145	100	53*27.5*31.5



### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	CARTON(cm)
			A	B		
A5507B	AC85-265V	7	55	105	100	31.5*31.5*48.5
A6009B	AC85-265V	9	60	110	100	35.5*35.5*54.4
A6012B	AC85-265V	12	60	120	100	35.5*35.5*58.5
A7015B	AC85-265V	15	70	130	100	37.5*37.5*56.5
A8018B	AC85-265V	18	80	140	100	42.5*42.5*60
C3703A	AC85-265V	3	37	100	200	43.5*22.5*44
C3705A	AC85-265V	5	37	120	200	43.5*22.5*50

## LIGHT SOURCE



### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)	Packing
			A	PCS/CTN
			B	CARTON(cm)
LC05G5.3C	AC85-265V	5/7	50	100
LC05G5.3E	AC85-265V	5/7	55	100
LC05GU10S	AC85-265V	5/7	50	27*27*24



### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)	Packing
			A	PCS/CTN
			B	CARTON(cm)
YUL007A	AC85-265V	7	40	100
YUL009A	AC85-265V	9	40	100
YUL012A	AC85-265V	12	53	100
YUL016A	AC85-265V	16	125	100
YSL007A	AC85-265V	7	40	100
YSL009A	AC85-265V	9	40	100
YSL012A	AC85-265V	12	61	100



### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)	Packing
			A	PCS/CTN
			B	CARTON(cm)
C3504C	AC220-240V	4	35	100
G4506B	AC220-240V	6	45	100
A6008C	AC220-240V	8	60	100

## STRIP LIGHT



Width [888888888888]



SPH2835D180B

### PARAMETER

Model	Voltage	Ship Power (w)	Dimension(mm)	Packing
			A	M/CTN
			B	CARTON(cm)
SPH2835D180B	AC230V	0.1	12	50
SPH2835D180B	AC230V	0.2	12	50

Width [888888888888]

Width [000000000000]



SPH5050D120D

SPH5050D60C

### PARAMETER

Model	Voltage	Power (w)	Width(mm)	Packing
			M/CTN	CARTON(cm)
SPH5050D60C	AC230V	0.5	10	50
SPH5050D96D	AC230V	0.5	12	50
SPH5050D120D	AC230V	0.5	12	50




SPH2835B180D

SPH5730B120D

### PARAMETER

Model	Voltage	Power (w)	Width(mm)	Packing
			M/CTN	CARTON(cm)
SPH5730B120D	AC230V	0.3/0.5	12	50
SPH2835B180D	AC230V	0.1/0.2	12	50

## STRIP LIGHT

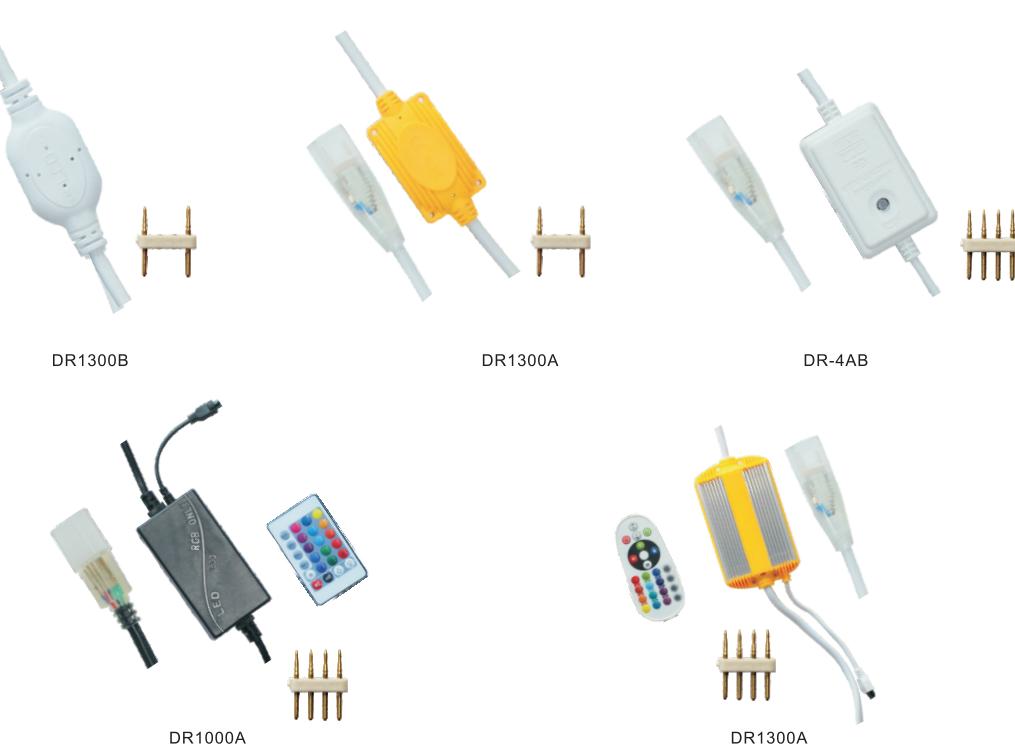


## PURIFIED LAMP



### PARAMETER

Model	Voltage	Power (w)	Length(mm)	Packing PCS/CTN	CARTON(cm)
PFL020A	AC175-265V	20	600	20	65*27*17
PFL040A	AC175-265V	40	1200	20	125*27*17
PFL018E	AC175-265V	18	600	30	62*28*18.5
PFL036E	AC175-265V	36	1200	30	122*28*18.5

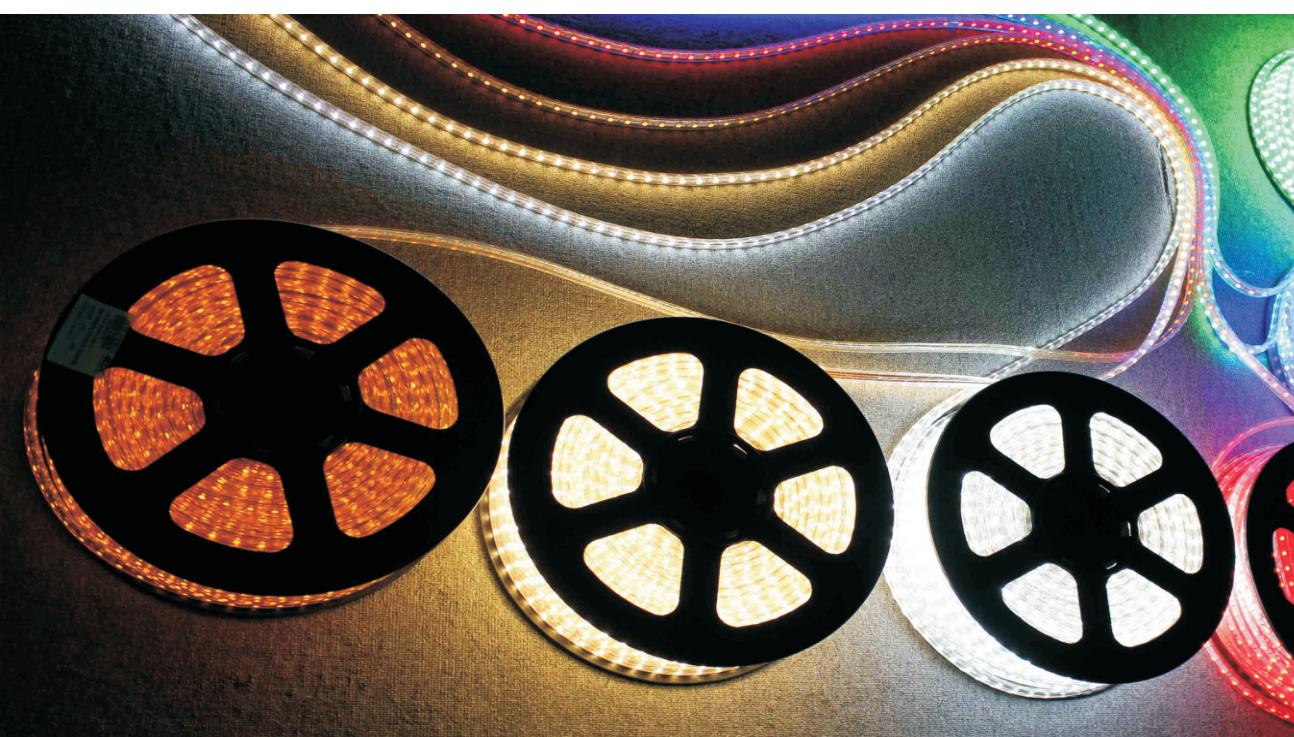

### PARAMETER

Model	Voltage	Power (w)	Length(mm)	Packing PCS/CTN	CARTON(cm)
PFL060A	AC85-265V	60	1200	20	125*27*17
PFL100A	AC85-265V	100	1200	20	125*37*17

## TUBE & FITTING



### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing
			A	B	PCS/CTN CARTON(cm)
TF1060B	\	\	600	33	30 63.5*17.3*16.3
TF1120B	\	\	1200	33	30 123.5*17.3*16.3
TF2060B	\	\	600	33	30 63.5*17.3*16.3
TF2120B	\	\	1200	33	30 123.5*17.3*16.3




Model	Voltage	Power (w)	Dimension(mm)		Packing
			A	B	PCS/CTN CARTON(cm)
TF1060D/A	\	\	600	33/40	30 63.5*17.3*16.3
TF1120D/A	\	\	1200	33/40	30 123.5*17.3*16.3
TF2060D/A	\	\	600	33/40	30 63.5*17.3*16.3
TF2120D/A	\	\	1200	33/40	30 123.5*17.3*16.3
TF1060F	\	\	600	40	30 64*21.5*15.5
TF1120F	\	\	1200	40	30 64*21.5*15.5
TF2060F	\	\	600	40	30 124*21.5*15.5
TF2120F	\	\	1200	40	30 124*21.5*15.5

### PARAMETER


Model	Power (w)	Lumen	Dimension(mm)		Packing
			A	B	PCS/CTN CARTON(cm)
TL0809F	9	600lm	600	26	30 64.5*21*18
TL0810F	10	800lm	600	26	30 64.5*21*18
TL0810F	10	900lm	600	26	30 64.5*21*18
TL0813F	13	1250lm	600	26	30 64.5*21*18
TL0818F	18	1200lm	1200	26	30 124.5*21*18
TL0820F	20	1600lm	1200	26	30 124.5*21*18
TL0820F	20	1800lm	1200	26	30 124.5*21*18
TL0825F	25	2300lm	1200	26	30 124.5*21*18

## DOWN LIGHT

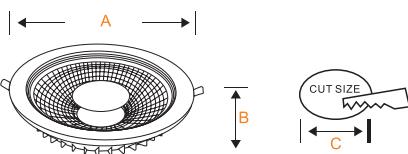

### PARAMETER


Model	Voltage	Power (w)	Dimension(mm)			Packing
			A	B	C	PCS/CTN CARTON(cm)
DLL007D	AC85-265V	7	88	54	70	100 49*29*41
DLL010D	AC85-265V	10	119	57	100	50 67*27*28.5
DLL015D	AC85-265V	15	173	51	150	40 52*37.5*38
DLL030D	AC85-265V	30	221	55	200	30 47.5*29*48

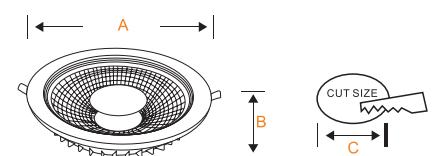

### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing
			A	B	C	PCS/CTN CARTON(cm)
DLL080M	AC85-265	80	225	110	220	10 59.5*26.5*51.5
DLL060L	AC85-265	60	225	110	220	10 59.5*26.5*51.5

## DOWN LIGHT




### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
DLL015F	AC85-265V	15	167	40	40	57.5*37.5*38
DLL030F	AC85-265V	30	220	40	20	47*27*47.5
DLL040F	AC85-265V	40	300	40	10	63*32.5*33.5

## PANEL LIGHT



★ ALUMINIUM






### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL003BR	AC85-265V	3	85	70	100	57.5*27.5*30
PLL006B(A)R	AC85-265V	6	120	105	60	44*27.5*35
PLL009BR	AC85-265V	9	145	130	60	53*27.5*43
PLL012B(A)R	AC85-265V	12	170	155	40	41*27.5*46
PLL018B(A)R	AC85-265V	18	220	205	40	52*25*53.5
PLL024B(A)R	AC85-265V	24	300	285	20	53*33.5*34.5

### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
PLL024QR	AC85-265V	24	220	58	20	46.5*35*52
PLL036QR	AC85-265V	36	300	58	10	63*45*32.5

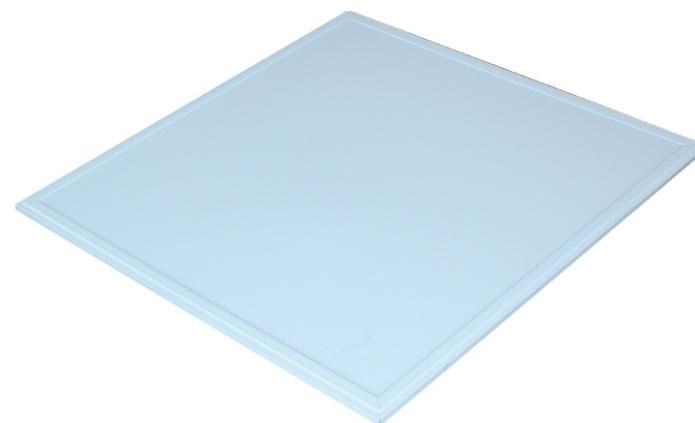

### PARAMETER

Model	Voltage	Power (w)	Dimension (mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
GRL072D	AC85-265V	72	595	595	10	62*32*62.5
GRL100D	AC85-265V	100	595	595	10	62*32*62.5
GRL120D	AC85-265V	120	595	595	10	62*32*62.5

## FLOOD LIGHT



## FLOOD LIGHT



### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing PCS/CTN	Packing CARTON(cm)
			A	B	C		
FLL100BE	AC85-265V	100	250	181	40	10	38*18*28
FLL200BE	AC85-265V	200	300	250	40	10	22*18*31
FLL300BE	AC85-265V	300	353	250	40	5	26.5*18*37
FLL400BE	AC85-265V	400	455	255	40	5	31.5*18*46




### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing PCS/CTN	Packing CARTON(cm)
			A	B	C		
FLL010AL	AC85-265V	10	70	90	28	50	62*19.5*20.5
FLL020AL	AC85-265V	20	135	100	28	30	37*18.5*40
FLL030AL	AC85-265V	30	160	120	28	20	40*19.5*30
FLL050AL	AC85-265V	50	200	145	28	20	48*19.5*35
FLL100AL	AC85-265V	100	242	180	32	10	57*22*43
FLL150AL	AC85-265V	150	292	216	45	10	55*35*24.5
FLL200AL	AC85-265V	200	350	260	45	5	40.5*28.5*29

### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing PCS/CTN	Packing CARTON(cm)
			A	B	C		
FLL050AJ	AC85-265V	50	240	220	80	10	46.5*45*26
FLL100AJ	AC85-265V	100	300	245	80	6	50*32*26.5
FLL150AJ	AC85-265V	150	366	305	80	1	38.5*21*32.5
FLL200AJ	AC85-265V	200	435	335	100	1	45.5*35.5*13
FLL300AJ	AC85-265V	300	520	365	100	1	54*38.5*13
FLL400AJ	AC85-265V	400	630	375	100	1	65*38.5*13
FLL500AJ	AC85-265V	500	740	375	100	1	76*39.5*13
FLL600AJ	AC85-265V	600	860	375	100	1	88*39.5*13

## FLOOD LIGHT



### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)			Packing	
			A	B	C	PCS/CTN	CARTON(cm)
FLL030BD	AC85-265V	30	160	120	35	30	41*22*34.5
FLL050BD	AC85-265V	50	220	190	55	20	46.5*34.5*41.5
FLL100BD	AC85-265V	100	280	255	70	10	54.5*42*30
FLL200BD	AC85-265V	200	350	305	90	5	52*37*33
FLL300BD	AC85-265V	300	369	435	80	2	45.5*19.5*39
FLL400BD	AC85-265V	400	439	523	99	1	57.5*14.5*48.5

## SOLAR SERIES




SEL002B	SEL004D	SEL005E	SEL006F
Model	Solar Panel	Battery Capacity	Control Mode
SEL002B	POLY 6V/0.65W	1*3.7V 800MAH	Motion sensor +Time control +Light control
SEL004D	POLY 6V/0.65W	1*3.7V 800MAH	Motion sensor +Time control +Light control
SEL005E	POLY 6V/0.55W	1*3.7V 800MAH	Motion sensor +Time control +Light control
SEL006F	POLY 6V/1.3W	1*3.7V 1500MAH	Motion sensor +Time control +Light control
			Discharging Time
			MAX:10Hrs

## Highbay light



### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
HBL100D	AC85-265V	100	280	50	1	30*30*18
HBL150D	AC85-265V	150	380	55	1	40*40*18
HBL200D	AC85-265V	200	380	55	1	40*40*18
HBL250D	AC85-265V	250	480	60	1	50*50*18
HBL300D	AC85-265V	300	480	60	1	50*50*18

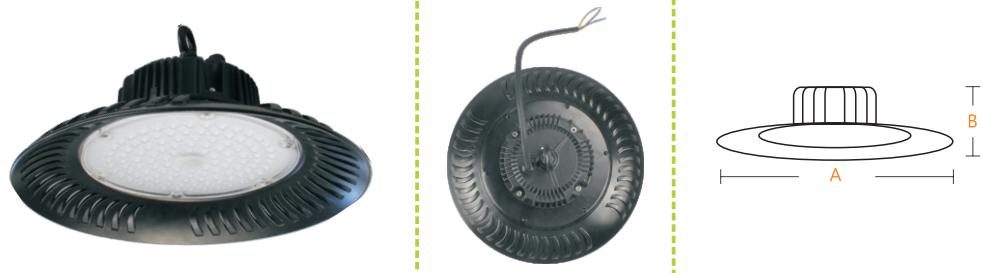

### PARAMETER

Model	Voltage	Power (w)	Dimension(mm)		Packing	
			A	B	PCS/CTN	CARTON(cm)
HBL050C	AC85-265V	50	250	48	1	26*26*15.5
HBL100C	AC85-265V	100	300	53	1	31*31*15.5
HBL150C	AC85-265V	150	350	53	1	36*36*15.5



SLL006	SLL002C	SLL002B	SLL001A
Model	Solar Panel	Battery Capacity	Control Mode
SLL006	POLY 3.7V/0.88W	1*3.7V 1200MAH	Light control
SLL002B	POLY 5.5V/1W	1*3.7V 1800MAH	Light control
SLL002C	POLY 5.5V/1W	1*3.7V 1800MAH	Light control
SLL001A	POLY 5.5V/1.5W	1*3.7V 1800MAH	Motion sensor +Time control +Light control
			Discharging Time
			MAX:4Hrs
			MAX:10Hrs
			MAX:10Hrs
			MAX:10Hrs